



(12) UK Patent (19) GB (11) 2 333 724 (13) B

(45) Date of publication: 17.07.2002

(54) Title of the invention: Smart porous film or material

(51) Int Cl⁷: B32B 33/00, A61F 13/513, B32B 7/02 // B65D 65/30

(21) Application No: 9802068.8

(22) Date of Filing: 30.01.1998

(43) Date A Publication: 04.08.1999

(52) UK CL (Edition T):

B2E EFBB E1301 E1312 E1701 E1703 E1729
E1733 E1734 E443S E456T E487T E489T
B5N N0324 N0702 N175 N177 N180 N199
N20Y N207 N401 N402 N418 N42X N53X N53Y
N530 N531 N563 N579 N58X N58Y N695 N696
N735 N750 N751 N764 N78X N784 N787
U1S S1012 S1049 S1734 S3020

(56) Documents Cited:

GB 2254044 A

EP 0122085 A

(58) Field of Search:

As for published application 2333724 A viz:

UK CL (Edition P) B2E EEC EFBB EM

INT CL⁶ A61F 13/15 13/46, B32B 7/02 33/00

Online: WPI, JAPIO

updated as appropriate

(72) Inventor(s):

Colin Dawson

Julian Vincent

(73) Proprietor(s):




The Secretary of State for Defence
(Incorporated in the United Kingdom)
Ministry of Defence, Whitehall, LONDON,
SW1A 2HB, United Kingdom

(74) Agent and/or Address for Service:

Stephen Skelton

D/IPR (DERA) Formalities, Poplar 2,
MOD (PE) Abbey Wood #19, BRISTOL,
BS34 8JH, United Kingdom

1 of 2

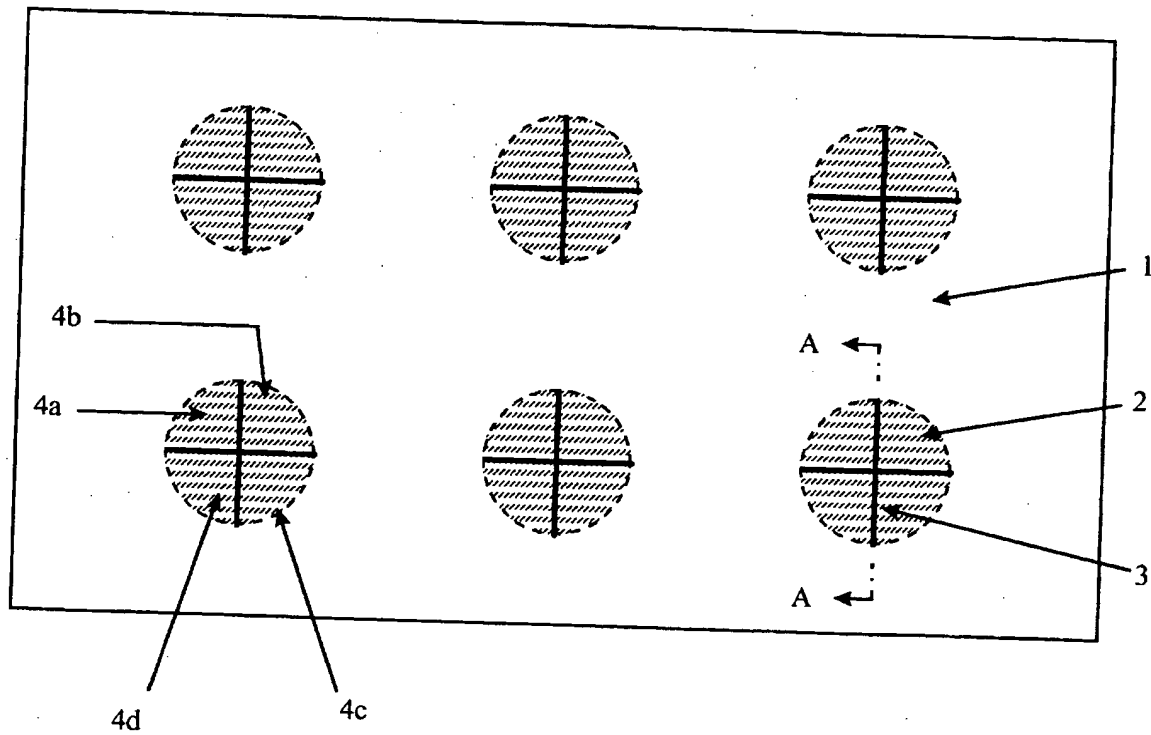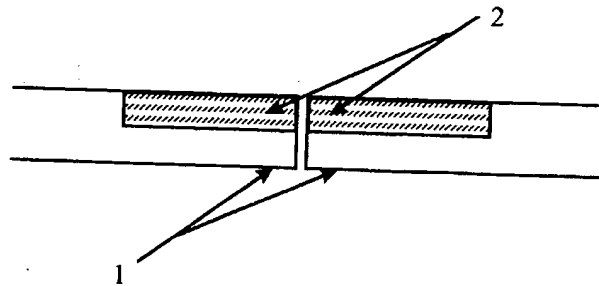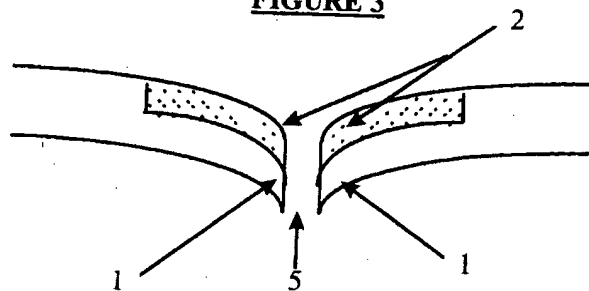FIGURE 1**FIGURE 2****FIGURE 3**

2 of 2
FIGURE 4

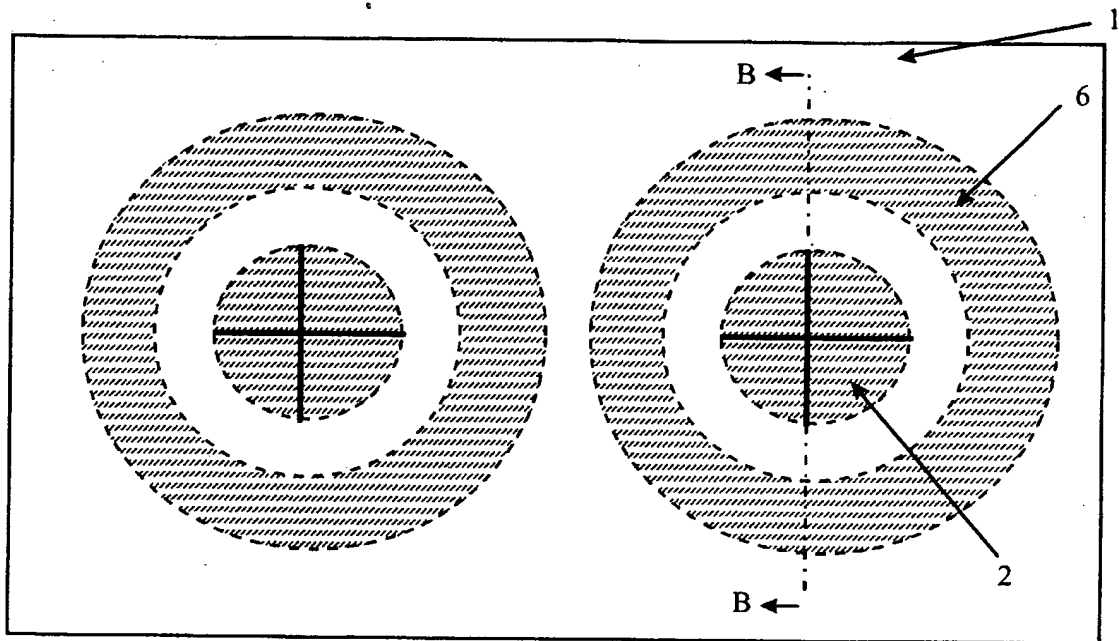


FIGURE 5


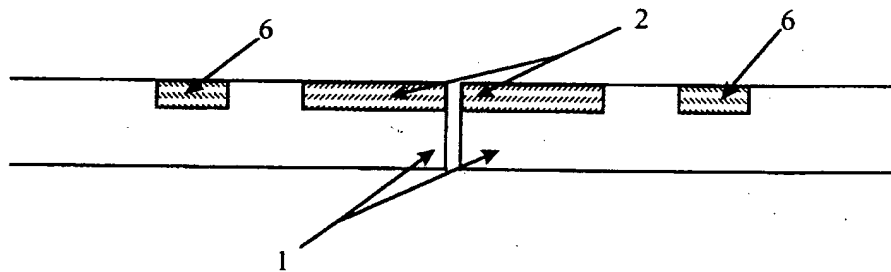


FIGURE 6

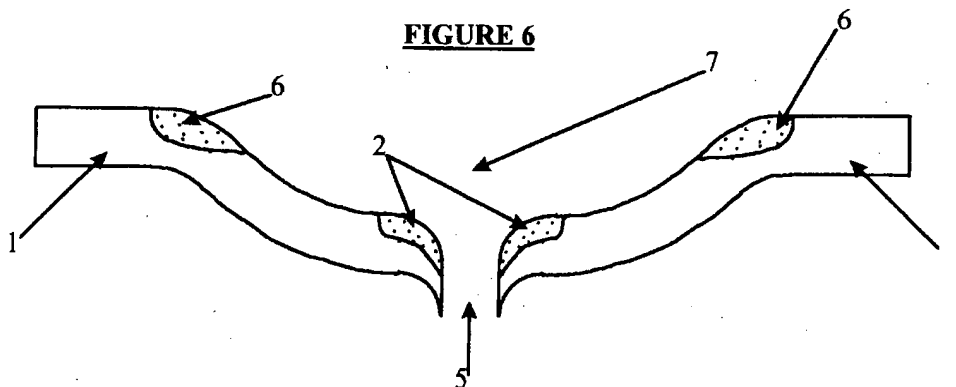

SMART POROUS FILM OR MATERIAL

The present invention relates to smart films and materials particularly those which can modify their porous properties.

When covering objects with a protective film or material it is
5 often desirable for the film or material to be capable of allowing fluids, such as liquids and gases, to pass from the object through the film or material to the surrounding environment.

Examples of this requirement can be found particularly in clothing where a variety of Moisture Vapour Permeable (MVP) materials are
10 known which allow water vapour to pass through the garment thus removing a proportion of the sweat generated by a wearer. These materials are also widely used in the medical field in the form of bandages and dressings. Also known are materials such as Stomatex (RTM) which is a rubber material having a number of perforations
15 spread throughout the material. The material has pockets below each perforation configured so as to allow a local build-up of vapour pressure before allowing the gases through. In both the clothing and medical uses these materials perform their specific function but are limited in that they can only remove gases and
20 vapours and have a limited performance which is constant and does not change in response to environmental changes. Thus under extreme conditions the material will not be able to function satisfactorily.

An aim of the present invention is to provide a smart porous film
25 or material which automatically controls its porous properties in relation to changes in its local environment thus allowing fluids to pass through the film or material in a controlled fashion.

Accordingly, the present invention provides a smart film or material, a surface of which has discrete areas which have fluid absorption properties different from the rest of the film or material, wherein the discrete areas are areas of the film or material which have been plasma treated or treated with chemicals or radiation so as to modify their fluid absorption properties, the film or material being cut so as to provide a plurality of close fitting flaps through the film or material such that any strain difference between the discrete areas and the rest of the film or material, caused by the difference in fluid absorption properties, will cause the flaps to bend thus providing an opening or openings in the film or material.

- 10 The bending of the flaps is a result of the discrete areas having a different affinity for a fluid than the remainder of the smart film or material.

One example of this effect is where a discrete area has different hydrophilic properties to the remainder of the smart film or material.

15

In a more specific example a discrete area could be arranged to take in more water or water vapour from the local atmosphere than the layer which it covers it then expands causing a strain difference between it and the layer which it covers. This strain difference causes the flaps to bend in the most energetically favourable direction.

20

The advantage of the above is that a film or material whose porosity can change in a controlled manner in response to changes in its local environment is provided.

- 25 In use the film or material can be substantially impermeable such that fluids cannot pass through the film or material except via the openings caused through the film or material. Alternatively the film or material can be permeable, in such an embodiment the amount of fluid which can pass through the film or material is increased or decreased by the opening or closing of the flaps through the film or material.

- 30 The discrete areas are formed by locally modifying the film or material's fluid absorption properties this is done by plasma treating a surface of the film or material or by treating a surface of the film or material with chemicals or radiation. For example, exposing a material composed of an uncrosslinked polymer to a source of high energy radiation (such as UV light

or gamma rays) or ionic particles (such as a plasma) it is possible to form crosslinks between the polymer molecules. If the initial starting material is hydrophilic it will be made more hydrophobic by this treatment and the material may also become stiffer.

- 5 Advantageously the discrete areas can be only a few millimetres in diameter and can be dispersed over the entire layer, or in specific locations of the layer, in a density defined by the level of porosity required of the film or material. The size of the

discrete areas will in practice be limited by manufacturing techniques and the ability to make accurate, small cuts through the film or material.

Obviously larger discrete areas can be provided should large
5 openings be required such as would be needed to allow liquids instead of gases to pass through the film or material.

The cutting of the flaps is preferably done so as to form a plurality of flaps which are located in a close fitting arrangement, i.e. the amount of material removed during cutting
10 should be kept to a minimum. This is advantageous as it aims to maintain as much of the properties of the uncut film or material as is possible. Usefully this can be done using laser or punching techniques.

Any number of close fitting flaps can be provided at a single
15 location in the film or material however a minimum of 3 flaps will allow the flaps to bend easily providing an opening. Further flaps would increase the size of opening produced at each location, however, the cutting procedure increases in complexity, and the amount of material removed will be increased, as more cuts are
20 needed. The removal of more material will increasingly affect the overall properties of the film or material when the flaps are closed.

An additional improvement of the invention can be obtained by causing a further discrete area which has fluid absorption
25 properties different to the rest of the layer to be formed, which individually surrounds some or all of the discrete areas and is disposed from the discrete area it surrounds. This can be done in

the form of a hoop. When the environment adjacent to a further discrete area changes the strain differences between the layer and the further discrete area, as a result of their different fluid absorption properties, causes a pocket or bulge to form in the film or material. Provision of a pocket or bulge beneath the opening formed by the flaps may improve the efficiency of the proposed system. For example, when the pocket or bulge is formed the concentration of a gas, such as water vapour, could be allowed to build up to high levels before the flaps formed in the discrete area are caused, as a result of strain differences between the layers of the flap, to bend thus forming an opening. Once the opening has formed gas exchange between the pocket or bulge and the environment can occur by a process of diffusion. Diffusion is driven by concentration gradients and as such this process of gas exchange is increased by the high concentration of gas in the pocket or bulge and would quickly reduce the level of gas inside the chamber thus allowing the flaps to close. This also reduces the amount of time that the flaps are required to be open.

A film or material according to the present invention can be used in a variety of applications. These applications include use in clothing, medical applications, food wrappings and structures such as tents and garden cloches.

When in use as a clothing material the material can be arranged to have a predetermined porosity which will be capable of being increased by the opening of the flaps in response to changes in the local environment caused by the actions of the wearer. This could possibly be as a result of an increase in the workload of the wearer causing the wearer to become hotter thus requiring an

increased amount of fluid, either in the form of moisture vapour or sweat, to be removed from the body. This opening of the flaps could be arranged to occur as a response to an average level of fluid absorption in the film or material or only to occur at
5 extreme levels to reduce heat stress under heavy exertion.

Medical uses of a film or material according to the present invention include uses in bandages or dressings for wounds where it is desirable to either keep the covered area dry or allow gases to escape from the covered area. Again a film or material could be
10 arranged such that the flaps open under average conditions or the flaps could be arranged to open only under extreme conditions.

Uses as food wraps are similar to the medical uses where food needs either to be kept dry or free from a build up of gases. Particular uses in food wraps are where the film or material
15 absorbs gases naturally emitted from the food causing pores to open and thus allowing the gases to be released.

When used in structures such as tents or garden cloches the film or material can prevent the build up of condensation on the inside of the structure or it can allow gases given off from within the
20 structure to escape.

As stated the film or material will be made more porous by the cuts made in it, even when the resulting flaps are closed, unless these cuts can be made to be so close fitting so as to render them impermeable or the cuts are made under tension such that when
25 released the flaps are in close contact with each other. As such the smart film or material may be required to be combined with further materials, possibly using moisture vapour permeable

materials or tufted, embedded or woven hairs or fibres, to provide the required overall properties. Another material which could be used is a fur-mimetic material acting as an outer layer to provide protection from rain.

- 5 The following are, by way of example only, four examples of methods of manufacturing materials in accordance with the present invention:

Example 1

10 A 2x2 200 gsm polyester plainweave fabric is passed through a solution of primer and after drying is stippled with a jet printer dot paste coating and immediately contacted with a powder comprising a 1:1 dry blend of polyvinyl alcohol and polyacrylic acid, pressure being applied by a heated roll at 170 deg C.

15 The resulting 5mm diameter adhered disks are present at a surface density of two per square centimetre in a regular grid pattern.

The fabric is subsequently passed intermittently through the work zone of a focused and collimated indexing Carbon Dioxide laser which irradiates each disk area in turn producing cruciform slots each 0.3mm in width and 3mm in length through the disk area.

20 Example 2

A previously degreased 300gsm polyester cored cotton plainweave fabric is passed through the Nitrogen atmosphere work zone of an indexed scanning electron beam (300KeV, 15mA) traversing the full width of fabric at a lateral sweep velocity of 25m/min.

Acrylic Acid is sprayed onto one side of the fabric in striated zones and the fabric passed through a drying oven at 100 deg C with a residence time of 10 minutes followed by cooling to room temperature over a further 10 minutes with fan assist.

- 5 The add on weight of polyacrylic acid is 200 gsm in the areas treated.

The fabric is subsequently punched with a cruciform pattern in the region of the striations only to give a pore density of one pore per square centimetre, the pores being 5mm long in each orthogonal
10 direction.

Example 3

A previously degreased 300gsm polyester cored cotton plainweave fabric is activated by electron beam exposure in selected zones and is then fully coated with N-vinylpyrrolidone containing 0.5%
15 by weight of N.N-methylene-bis-acrylamide. The fabric could also be activated chemically by treatment with any of peroxydisulphuric acid, chromic acid, ferric chloride/hydrogen peroxide or peroxyacetic acid.

The fabric is passed through a ventilated drying oven at 70
20 degrees C with residence time of 10 minutes followed by a further 10 minutes cooling with fan assist.

The fabric is then passed through a water bath with agitation to dissolves away the unfixed coating leaving a fabric having poly(N-vinylpyrrolidone) coating (200gsm) in irradiated zones only.

- 25 The fabric is then punched to form cruciform cuts.

Example 4

An A4 specimen of 60gsm microfibre polyester woven fabric is laid on foil and the exposed surface treated for 10 minutes in a cold
5 plasma barrel reactor with a maintained rarefied atmosphere of nitrogen containing 20% v/v N-vinylpyrrolidone (0.05 Torr) excited by a 100W microwave field (433MHz).

The polyester fabric is then exposed to a scanning and indexing CO2 laser to receive cruciform cuts.

10 The textile has become hydrophilic on one side, while remaining hydrophobic on the other.

An embodiment of the present invention will now be described, by way of example, with reference to the accompanying drawings, wherein

15 Fig 1. Shows a plan view of a smart porous material according to the present invention, the stippled areas indicating the smart discrete areas of the material.

Fig 2. Shows a section A-A through the material shown in figure 1.

Fig 3. Shows the same cross section as in figure 2 following
20 opening of the flaps.

Fig 4. Shows a plan view of an improved smart porous material according to the present invention, the stippled areas indicating the smart discrete areas of the material.

Fig 5. Shows a section B-B through the material shown in figure 4.

Fig.6. Shows the same cross section as in figure 5 following formation of the pocket and opening of the flaps.

A smart porous material according to the present invention is shown in figure 1 and comprises a layer (1), on which is arranged humidity sensitive discrete areas (2) which have different hydrophilic properties to the layer. These areas can be produced by plasma treatment of specific areas of the layer. Thus changing the hydrophilic properties of a relatively thin area (2) at the surface of the layer (1). The humidity sensitive discrete areas are arranged and sized so as to fit as many discrete areas on the layer as is required to give the necessary porous properties. Each discrete area and the layer beneath it is then cut, using laser techniques in the form of a cross (3), thus providing 4 flaps (4 a, b, c & d), two of which are shown in cross section in figure 2. When the humidity of the environment adjacent to a humidity sensitive discrete area increases the flaps will be caused to bend due to the strain differences caused by the different hydrophilic properties of the layer and discrete area, as shown in figure 3, thus causing an opening(5) to be formed in the material and causing the material as a whole to become more porous. When the humidity of the environment adjacent to the same discrete area decreases it will cause the flaps to straighten thus closing the opening and causing the material as a whole to become less porous, as shown in figure 2.

An improvement of the invention can be obtained by causing a further humidity sensitive discrete area (6), as shown in figures

4 and 5, to be formed in a hoop outside some or all of the discrete areas (2). As shown in figure 6, when the humidity of the environment adjacent to a further discrete area increases the strain differences between the layer (1) and further discrete area 5 (6), as a result of their different hydrophilic properties, causes a pocket (7) as well as the hole (5) to form in the material thus increasing the overall material's ability to transfer moisture. The hole (5) and the pocket (7) can be arranged to form at a similar humidity level or at different humidity levels.

12
CLAIMS

1. A smart film or material, a surface of which has discrete areas which have fluid absorption properties different from the rest of the film or material, wherein the discrete areas are areas of the film or material which have been plasma treated or treated with chemicals or radiation so as to modify their fluid absorption properties, the film or material being cut so as to provide a plurality of close fitting flaps through the film or material such that any strain difference between the discrete areas and the rest of the film or material, caused by the difference in fluid absorption properties, will cause the flaps to bend thus providing an opening or openings in the film or material.
2. A smart film or material according to claim 1 wherein the cuts are made using a laser or punch.
3. A smart film or material according to any of the preceding claims wherein at least some of the discrete areas are individually surrounded by a further discrete area which has fluid absorption properties different from the rest of the layer, the further discrete area being disposed from the discrete area which it surrounds.
4. A smart film or material according to claim 3 wherein at least one of the further discrete areas is provided in the form of a hoop.
5. A smart film or material according to any of the preceding claims which forms one element of a multi-element textile.
6. A smart film or material according to claim 1 wherein the film or material and the discrete areas have different hydrophilic properties.
7. A smart film or material as hereinbefore described with reference to the figures 1 to 6.